**ILLEGIB** 

**SECRET** 

25X1



# TECHNICAL PUBLICATION

NATIONAL PHOTOGRAPHIC INTERPRETATION CENTER

# EVALUATION OF CONVENTIONAL FILMS

25X1

SECRET

NPIC/R-42/71

**MAY 1972** 

**Declass Review by NIMA / DoD** 

TECHNICAL PUBLICATION

# EVALUATION OF CONVENTIONAL/NONCONVENTIONAL FILMS

MAY 1972

NATIONAL PHOTOGRAPHIC INTERPRETATION CENTER

SECRET

### **CONTENTS**

•		I	Page
Not	ice .		vii
Intr	oduci	tion	1
I.	Pho	tointerpretation Performance Analysis	. 1
	A. B. C.	Technique and Results	1 2
II.	Tec	hnical Analysis	. 5
	A. B. C.	Technique and Results Paired Comparison Test Resolution Analysis	. 5 . 5
III.	Men	suration Analysis	. 11
	A. B. C. D.	Technique and Results Dimensional Stability Repeatability Image Quality Estimate	. 11 . 12
Con	clusio	ons	. 14
		APPENDICES	
APF	END	OIX .	
	A. B. C. D. E. F. G.	General References  Differences Between Emulsion/Exposure-PI Performance Test  Preliminary Comparison DataTechnical Analysis  Ratio to Z ScorePaired Comparison Test, Technical Analysis  Paired Comparison Z ScoreTechnical Analysis  Dimensional Stability DataMensuration Analysis  Repeatability Data and Ranking Mensuration Analysis	. 16 . 17 . 19 . 20 . 21
	H.	Image Quality Scores-Mensuration Analysis	. 2.

Approved For Release 2	003/0 <b>5/ft@RET</b> A-RDP78B	04560A0073000108P2G/R-42/71	
			25X1

# **ILLUSTRATIONS**

Figure		Page
1. 2. 3. 4.	Example of Performance Test Question	7 9
	TABLES	
Table	·	
1.	ResultsPI Performance Test	1
2.	Latin Square Design	3
3.	ResultsFull Paired Comparison Test	5
4.	Multiple Range Test Results	6
5.	Percent of Variability Accounted for by Regression	8
6.	ResultsStability Test	11
7.	ResultsRepeatability Test	12
8.	ResultsImage Quality	13

Approved For Release 2003/05 <b>ያቢር ጽ ይ</b> ፕRDP78B04560A0073000100 ትሂ-5 <sup>C/R</sup>	(12),1
NOTICE	
This document constitutes one-half of a two-part study (see AFSPPF Special F 101-1-151, Westover AFB). The National Photographic Interpretation Center (NPIC) at U.S. Air Force Special Projects Production Facility (AFSPPF), Westover AFB, were task the Configuration Change Board (CCB) to conduct an analysis of reproduction product CCB specified the products to be tested and the original negative materials to be ungenerating the test samples. The films (reproduction materials) tested	nd the ked by ks. The
The NPIC test design was three-part: (1) Photointerpretation, (2) Mensuration (subcontoning accuracy and pointing repeatability), and (3) Technical (subcontoning resolution target analysis and overall quality comparison). The AFSPPF test was contoning five parts: (1) Characterization Studies, (2) Printing/Processing, (3) Bar Target Resolutions, (4) Photointerpretation Quality Appraisal, and (5) Microdensitometric Line Analysis.	divided ducted olution
There was a significant difference between NPIC and AFSPPF only in the resoranking of the duplication films. Average resolution calculations by NPIC resulted in a ranking of the Reduced Silver and Free Radical materials. These materials were considerably higher in the AFSPPF resolution analyses. This difference is attributed resolution reader variability and target reading technique used by each organization.	i lower ranked
The basic conclusions derived by both organizations were similar. In overall ranking encompassed all analysis procedures was preferred to all duplication films. While	ngs that e NPIC e best.

ranked viscous-processed first, AFSPPF found spray-processed to be best. Neither organization found significant difference between these films. The remaining duplication materials were ranked identically

SECRET NPIC/R-42/71	
	25X1
INTRODUCTION	
The National Photographic Interpretation Center has evaluated six duplicating films for their overall duplicating potential of large volume, roll film original negatives. This includes information transfer, tonal quality, resolution transfer and stability. The duplicating films evaluated  The overall results show that there is statistically no significant difference between the first by raw score. The remaining films rank in the following order.  The NDIC remaining his potential of large volume, roll film original negatives. The duplicating films films evaluated information transfer and stability. The duplicating films evaluated information transfer and stability information transfer and stab	25X 25X 25X 25X 25X
The NPIC test was subdivided into three parts: Photointerpretation Performance Analysis, Technical Analysis, and Mensuration Analysis. The test was high volume, production oriented; i.e., no attempt was made to examine any special applications of these films.	
The films and equipment used represent the state-of-the-art in processing and materials as of January 1971. The imagery used was selected from operational missions. All dupe films were exposed at a normal, +0.2, and -0.2 neutral density exposure level.	
I. PHOTOINTERPRETATION PERFORMANCE ANALYSIS	
A. Technique and Results	
Interpretation of targets was used to determine the photointerpreter's performance on the various duplication films. The overall ranking of the duplicating films by raw score shows that the photointerpreters performed the best when interpreting imagery duplicated ranked second, but significante tests show that there was no difference between the two processes. The remaining films are significantly poorer than both films; however, there is statistically no significant difference between these four film types (Table 1).	25X1 25X1
Table 1. Results-PI Performance Test (confirmed answers only)	
No Significant    Difference (α = 0.10)   Raw Score     100.0     98.4	
	INTRODUCTION  The National Photographic Interpretation Center has evaluated six duplicating films for their overall duplicating potential of large volume, roll film original negatives. This includes information transfer, tonal quality, resolution transfer and stability. The duplicating films evaluated  that there is statistically no significant difference between the first by raw score. The remaining films rank in the following order. These films are significantly poorer than both of the film types.  The NPIC test was subdivided into three parts: Photointerpretation Performance Analysis, Technical Analysis, and Mensuration Analysis. The test was high volume, production oriented; i.e., no attempt was made to examine any special applications of these films.  The films and equipment used represent the state-of-the-art in processing and materials as of January 1971. The imagery used was selected from operational missions. All dupe films were exposed at a normal, +0.2, and -0.2 neutral density exposure level.  I. PHOTOINTERPRETATION PERFORMANCE ANALYSIS  A. Technique and Results  Interpretation of targets was used to determine the photointerpreter's performance on the various duplication films. The overall tranking of the duplicating films by raw score shows that the photointerpreters performed the best when interpreting imagery duplicated ranked second, but significante tests show that there was no difference between the two processes. The remaining films are significantly poorer than both films; however, there is statistically no significant difference between these four film types (Table 1).  **Table 1. Results-PI Performance Test (confirmed answers only)**  No Significant Difference (a=0.10) Raw Score 100.0

Approved For Release 2003/05/14 : CIA-RDP	78B04560A007300010Q14c5/R-42/71

# **B.** Preliminary Considerations

A paired comparison and the performance test were considered as possible ways to test PI preference. The performance test was selected because a pilot study indicated that there is no difference between the results derived from comparison or performance methods. Also, the performance test is more like the interpreter's task of extracting information from photography than is the comparison test. The performance test took one-half the time of the paired comparison technique and had the additional benefit of reducing the PI reaction to superficial physical film characteristics. For example, the blue color of Free Radical might influence the PI performance in a comparison made but the actual print information content may be identical.

#### QUESTION

Record each letter in the box and check level of confidence for each letter.

	Letter	Conf	Prob	Poss
a				
b				
С				
d				
е				
f				
g				
h				
i			<u> </u>	

*NPIC* P-3707

FIGURE 1. EXAMPLE OF PERFORMANCE TEST QUESTION

# C. Performance Test

The performance test consisted of 38 questions based on aerial scenes. These questions required the photointerpreter to count or identify objects. The questions and imagery used were selected by a photoscientist, a photointerpreter, and a test design consultant. The questions were intended to test the interpreter's ability to extract information imaged at the threshold of detection and/or identification. The original negative was used as a basis for the correct answers.

A Latin Square design was used in the performance test. In using this design, learning effect has been eliminated by arranging the film/exposure combinations so that a PI will see only a given target/question combination once (Table 2).

Table 2. Latin Square Design\*

		•	uon 2	Lan	n squ	iare Des	ıgn↑											
REPLICATE						P.I.	J											
1	1	2	3	4	5	,												
2	20	21	22	23	Э		-		· -	-	-	-	-	-	-	-	-	19
3	39	40	41	23			<b>-</b>		-	-	-	-	-	-	-	7	-	38
4	58	59	71				-		-	-	-	-	-	-	-	-	-	57
5	77	J)							-	-	-	-	-	-	-	-	-	76
OUTCOM	, ,								-	-	-	-	-	-	-	-	-	95
QUESTION					Fili	m/Exp	osu	re (	Con	nbi	nai	tio	ns					
1	1	2	3	4								,10	113					
2	2	3	4	5	5	- * -		-	-	-	-	-	-	-	-	-	-	19
3	3	4	5	3				-	-	-	-	-	-	-	-	-	-	
4	4	5	3					-	-	-	-	-	-	-	-	-		
•	5	J						-	-	-	-	-	-					
:	:																	
:	•								•									
19	19	1	2	2		_												
20	1	2	2	3	4	5		-	-	-	-	-		-	-	-	-	1
21	2		3	4	5			-	-	-	-	-		-	-	-		19
•	3	3	4	5				-	-	-				-				
•		4	5					-	-	-	-							
:	4	5					-											
•	:																	
38	19 -	_		<u>.</u> .	_													
		3 Fil	lm/Ex	- เทคยา	re C	ombin	otic	-				-			•	-	-	1
*-1	~ `		,2	.Lost		OHIDIII	alIO	115	T U	ne	Co	nt	rol	L				

<sup>\*</sup>The basic design was doubled to provide more data for each film/exposure combination.

_	_		
വ	ᄃ	v	•
	υ	Л	

Five groups of 19 photointerpreters were used in this evaluation. This provided five replicates for each question on each film/exposure combination.

25X1 25X1

Viewing conditions were not rigidly controlled. The interpreters used light tables.

The interpreters were allowed to adjust both viewing magnification and light level.

25X1

Scoring of the test varied according to the type of question asked. The identification type question was scored as one for a correct or zero for an incorrect answer. The count type question was scored as follows: If the indicated count was equal to or less than the correct count, the indicated count was used as the score. If the indicated count was more than the correct count, the excess was subtracted from the correct count and that value used as the score. If this value was negative, zero was used as the score. Each answer was associated with a confidence level—confirmed, probable, or possible. For example, if ten trucks were imaged and the interpreter indicated 7 confirmed, 2 probable, and 1 possible, he was scored as follows: seven points in the confirmed category and 10 points for confirmed plus probable plus possible category. However, the results shown for this test are based on confirmed category answers only.

A one factor analysis of variance and the Duncan New Multiple Range Test were used to analyze the data. A score for each film/exposure combination was based on all 38 questions. The analysis of variance indicated film/exposure to be a significant factor. The range test was then used to show which films were significantly different. In order to rank emulsion type using the range test, the average over each exposure within a given emulsion was calculated and the variances of each exposure pooled. The five replicates (five groups of interpreters) provided the error term to be used in the range test.

Approved For Release	2003/05/14 ECMARDP	78B04560A0073000100 <sup>-</sup>	12×501C/D	12/71
Approved For Release	ZUUSIUSI I <b>N FURKIY</b> DE	10D04300A0013000100	YPIC/R-4	<del>1</del> 2//]

	25X1
	20/(1

#### II. TECHNICAL ANALYSIS

#### A. Technique and Results

The quality of the subject duplicate materials was evaluated by two methods, a paired comparison and resolution target analysis. Both these tests show to be the best duplicating product.

#### B. Paired Comparison Test

	The Paired comparison Test was conducted to analyze the subjective impression of quality
V	with respect to each emulsion. The results show that the films are significantly better
E	And, there is no difference between
	significantly poorer than all the other films (see Table 3).

Table 3. Results--Full Paired Comparison Test

Γ	No Significant <u>Difference (α=0.10)</u>	Raw Score	Normalized <u>Score</u>
	<del></del>	116	100.0
	<del></del>	110	94.9
	<del></del>	101	86.8
	===	96	83.0
	<del></del>	93	80.5
		81	70.1

The paired comparison technique is an excellent subjective method for distinguishing small differences in image quality. Three scenes were chosen which were judged to be free from manufacturing defects. This provided 3 sets of 18 chips for comparison. To make the experiment shorter, a preliminary comparison was conducted to determine the best exposure per scene for each emulsion. This reduced the number of comparisons to 3 sets of 6 emulsions. A full paired comparison test was then conducted for these 18 chips.

Five experienced photographic technologists made the comparisons. They were instructed to keep in mind resolution, sharpness, graininess, and tonal quality. All observations were made with an Microscope.


25X1

25X1

25X1

25X

25X



The data was statistically analyzed using an Analysis of Variance and the Duncan New Multiple Range Test. First, the ratio

$$R = \frac{N_c}{N_o}$$

was calculated.  $N_C$  is the number of times the chip was chosen as superior and  $N_O$  is the number of times the chip was presented. This ratio was then converted to a standard score  $(Z_O)$  using a cumulative normal distribution table. A positive number  $P_Z$  was calculated by:

$$P_z = (Z_0 \times 10) + 100$$

 $P_{\mathbf{z}}$  was then used as the response for each chip (see Appendix E for  $P_{\mathbf{z}}$  values).

An analysis of variance showed film type to be a significant factor. The range test was used to determine which film types were significantly different from each other (Table 3).

#### C. Resolution Analysis

Fifty tri-bar resolution targets were read by nine experienced photoscientists. The targets were read on the original film and on each of the 18 duplicate film/exposure combinations. To assess the duplication potential of each emulsion, an average resolution figure for each observer and film/exposure combination was calculated by averaging over the 50 targets. A three-factor (observer, emulsion, exposure) analysis of variance was used to test for significant factors. All three factors were significant. To test for significance among emulsions, the values for each emulsion were averaged over observers and exposure. The Multiple Range Test was used and the results are shown in Table 4.

Table 4. Multiple Range Test Results

No Significant Average Resolution

Difference (a = 0.10) (1/mm)

84.6
84.3
79.2
77.2
73.9
70.9

25X1 X1

25X1

The films are significantly better than the remaining duplicating films and there is no difference between the films. Further tests which included the Original Negative (O.N.) readings show that the films are not significantly different from the original negative.

Another factor that was examined was the relation between original negative and duplicating film resolution readings. A second order linear regression analysis was performed on each of the duplicating films against the original negative. These curves are shown in Figure 2.

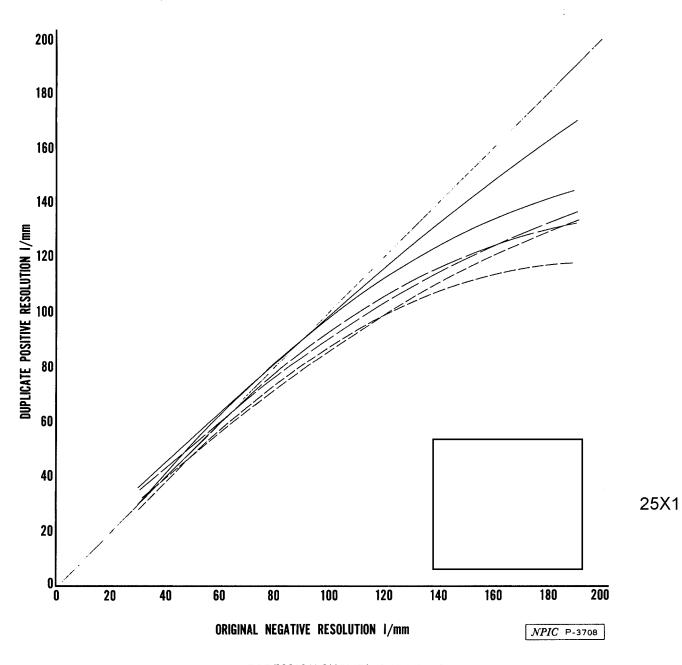


FIGURE 2. REGRESSION CURVES--O.N. VS D.P.

Ideally, this relation should be a straight line with a slope of 1.00. However, resolutions above 150 1/mm show a greater loss in the reproduction process. This caused the best fit to be of second order. The amount of data above 150 1/mm was very small. Scatter diagrams of the data throughout the whole resolution range and above 150 1/mm are shown in Figures 3 and 4 respectively. There is a trend, however, for a greater resolution loss in \_\_\_\_\_\_\_ than that in \_\_\_\_\_\_\_ or resolution above 150 1/mm. This is only a trend and is based on only a few data points. More data above 150 1/mm is needed to further assess the duplication potential of these films at higher resolutions.

Four hundred and fifty data points were used to compute the regression lines. That is, nine observers read fifty targets and only the data from the best exposure was used. In Table 5, the amount of variability accounted for by the regression equation is tabulated.

Table 5. Percent of Variability Accounted for by Regression

Percentage
72.04
68.95
69.52
66.98
71.46
71.94

Approximately 70 percent of the variability due to the dupe films as a function of the original negative input is accounted for in regression. The remaining 30 percent of the variability is due to error and/or other untested factors in the regression; for example, targets or observers were not tested for in this portion of the experiment.

Further testing of these film types for resolution transfer is warranted at resolutions greater than 150 l/mm.

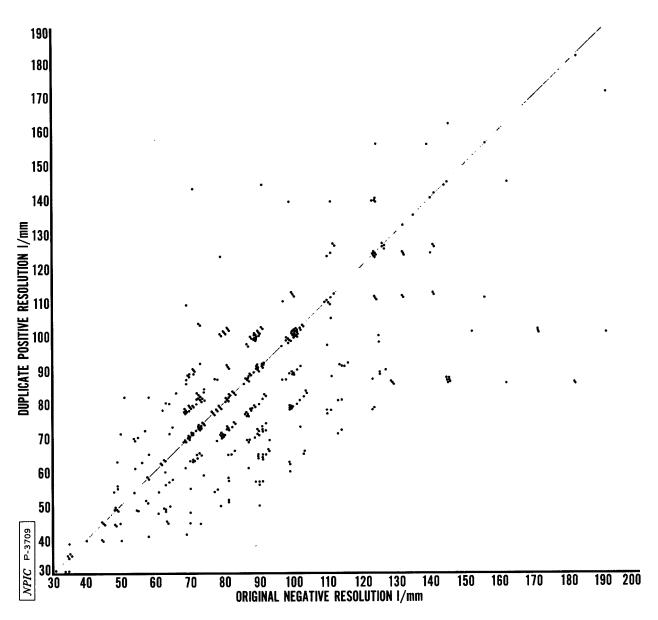


FIGURE 3. TYPICAL SCATTER DIAGRAM

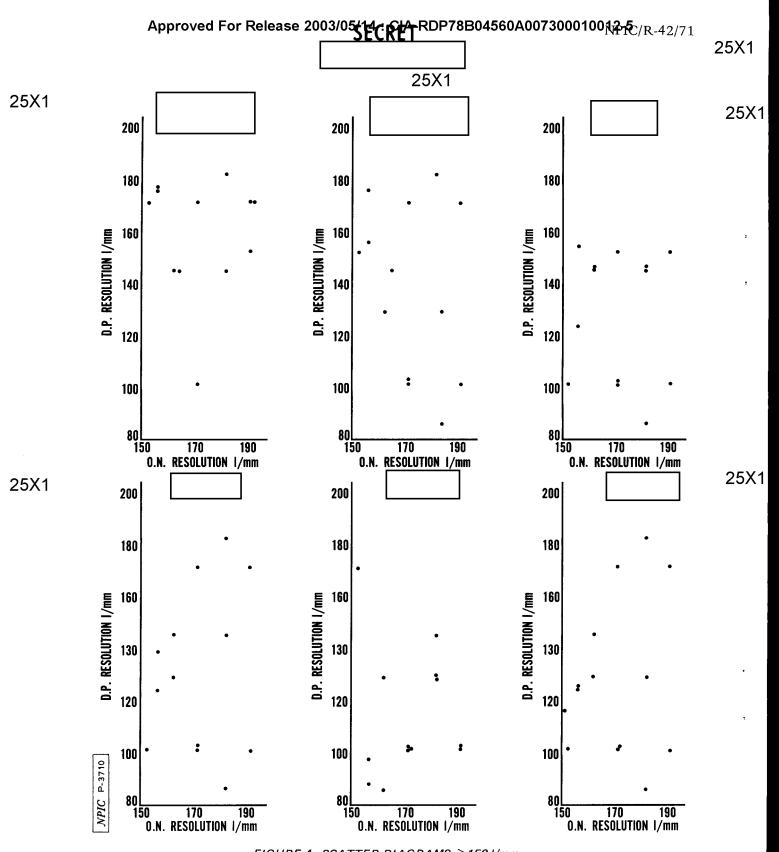


FIGURE 4. SCATTER DIAGRAMS, >150 I/mm 25X1

- 10 -

Approved For Release 2003/05/1 <b>45;E(1);E</b> PDP78B04560A007300010012;5 <sub>PIC/R-42/7</sub>
--

III. MENSURATION ANALYSIS

# A. Technique and Results

The mensuration analysis was divided into three parts: Film Stability, Pointing Repeatability, and Image Quality Preference (subjective judgment by photogrammetrists). The overall results show that stability is the best for mensuration are considered acceptable are considered unacceptable mainly due to film/emulsion instability.

All pointings were accomplished by five experienced photogrammetrists using a Comparator. A total of 1900 pointings were made. (The points chosen for this test were light-on-light, dark-on-dark, light-on-dark, and dark-on-light).

Two points defined distances in each direction--along and across track on the film. Each of the five photogrammetrists replicated each measurement five times to yield a satisfactory estimate of experimental error. All results were evaluated using analyses of variance and range tests.

# B. Dimensional Stability

(L) = Longer than O.N.

Dimensional stability is defined, in this case, as the difference between measurements of the same object on the original negative and the duplicate positive. The results are listed in Table 6.

Table 6. Results-Stability Test

Along Track Δ from O.N.  (μm)	No Sign. <u>Diff.</u> α=0.01)	Across Track Δ from O.N. (μm)
0.7 (L) 2.5 (S) 7.1 (S) 10.5 (S) 24.1 (S) 32.6 (L)  (S) = shorter than O.N.		3.4 (S) 5.3 (S) 6.5 (S) 7.5 (S) 50.3 (S) 126.0 (S)

25X1

- 11 -

25X1

25X1

25X1

Since two unique distances were involved, an analysis of variance was done twice. Each time, films were a significant factor. The Duncan New Multiple Range Test was used to test for significance among films. The data used represented the average of the five observations and three exposures (Table 6).

# C. Repeatability

Repeatability is defined as the precision of the individual pointings. The results of this test show that Dry Silver is significantly poorer than the remaining film types.

The variance of each point (x and y) for each observer was transformed using common log transformation so that the variances would approximate a normal distribution. The average of the five observers on each chip was then used as the response. An analysis of variance showed that exposure level was not significant; therefore, the responses for each exposure level were averaged and used as the response for the emulsion. The films were then tested for significant difference using the Neuman-Keuls sequential range test (Table 7).

Table 7. Results-Repeatability Test

Variance (m <sup>2</sup> )	No Significant Difference $(\alpha = 0.01)$
0.85	
0.96	<b>←</b>
1.12	
1.43	-
1.60	<del></del>
2.05	

25X1

Approved For Release	2003/05 <b>CIPA: DOTAT-</b> RDP7	/8B04560A0073000100 <b>ካ<u></u>ጀዛ</b> \$/R-	42/71
Approved For Release		0D07000A0010000100-12-0-7	,

### D. Image Quality Estimate

Image quality is defined as the qualitative impressions of the photogrammetrist while viewing the imagery in the comparator. This judgment is primarily based on the ease with which the photogrammetrist can observe a given point. The results show that anked first (Table 8).

25X1

The scores are totals of each individual's evaluation. The scoring was based on the following: excellent--4, good--3, fair--2, and poor--1.

Table 8. Results--Image Quality

Perfect score: 240

Approved For Release 2003/05/15 ECREPP7	'8B04560A007300010012-5_
ZECKE!	NPIC/R-42/71
	25X1

### **CONCLUSIONS**

	Based on all three analyses, the films can be ranked from best to worst	
25X1	with no significant difference established	
25X1	These films are significantly different	$\exists_{i_{0}}$
•	significantly poorer than the remaining films.	12

These analyses were designed to assess overall duplicating quality. No attempt was made to test for special applications, such as high contrast printing and/or highlight or shadow detail enhancement. The films were judged for their ability to duplicate the original negative material in a large volume, roll film production operation.

Further data should be collected and analyzed for testing the duplication of original negatives with resolutions greater than  $150\ l/mm$ .

- 14 -

25X1 25X1 25X1

### Appendix A. General References

Anderson, Virgil L., "Designs and Optimum Techniques for Consulting Statisticians and Experimenters," unpublished notes, Department of Statistics, Purdue University, Lafayette, Indiana.

Bartlett, M.S. and Kendall, D.G., "The Statistical Analysis of Variance - Heterogeneity and the Logarithmic Transformation, J. Royal Statistical Society, Supplement B, 8:1:128-138, 1946.

Beyer, William H., Handbook of Tables for Probability and Statistics, the Chemical Rubber Company, pp. 368-378, 1968.

Duncan, David B., "Multiple Range and Multiple F Tests," Biometrics, 11:1:1-42, March 1955.

Edwards, A.L., Experimental Design in Psychological Research, p. 136, Holt, Rinehart, and Winston, 1965.

Johnson, Norman L. and Leone, F.C., Statistics and Experimental Design, Vol. 1, John Wiley & Sons, New York, 1964, pp. 410-412.


Kirk, Rogers, Experimental Design: Procedures for Behavioral Sciences, Brook/Cole Publishing Co., pp. 93-94, 1968.

Natrella, Mary G, "Experimental Statistics", National Bureau of Standards Handbook 91, U.S. Government Printing Office, August 1963, p. T-3.

Ostle, Bernard, Statistics in Research, 2nd Ed., the Iowa State University Press, Ames, Iowa, 1963.

Roger, Robert E. and Mikhail, E.M., Study of the Effects of Nonhomogeneous Target Backgrounds on Photogrammetric Coordinate Measurement, Final Technical Report, U.S.A.E.T.L. - RI, Fort Belvoir, August 1969.



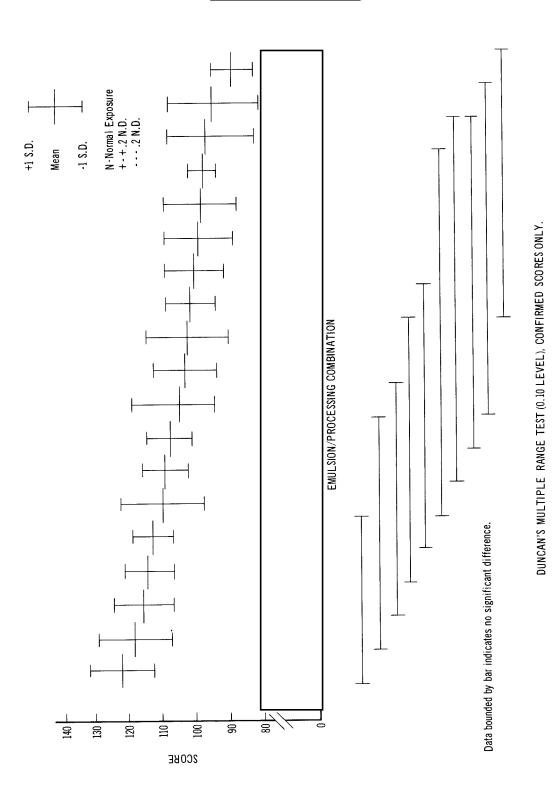

APPENDIX B. DIFFERENCE BETWEEN EMULSION/EXPOSURE-PI PERFORMANCE TEST

# APPENDIX C. PRELIMINARY COMPARISON DATA--TECHNICAL ANALYSIS

#### Ranking of Exposure

	Target No.	Rank Observ		erver				
	Turget 140.	Exposure	1_	2	<u>3</u>	4	5_	Total
•	20	+.2 N.D.	3	3	3	3	3	15
	20	Normal	2	2	2	2	2	10
		2 N.D.	1	1	1	1	1	5*
	20	+2 N.D.	2 ·	3	3	3	3	14
	33	Normal	3	2	1	2	2	10
	•	2 N.D.	1	1	2	1	1	6*
	40	+2 N.D.	3	2	3	3	3	14
	40	Normal	· 1	3	1	2	2	9
		2 N.D.	2	1	2	1	1	7*
	20	+.2 N.D.	. 3	3	3	3	3	15
	20	Normal	2	2	1	1	2	8
'		2 N.D.	1	1	2	2	1	7*
		+.2 N.D.	2	3	3	2	3	13
	33	Normal	3	2	2	1	2	10
25X1		2 N.D.	. 1	1	1	3	1	7*
25/(1	40	+.2 N.D.	3	3	1	2	3	12
		Normal	2	2	2	1	2	9
		2 N.D.	1	1	3	3	1	9*+
	20	+.2 N.D.	3	3	3	3	3	15
	20	Normai	2	2	1	1	2	8
		2 N.D.	1	1	2	2	1	7*
	20	+.2 N.D.	3	3	2	3	3	14
	33	Normal	2	2	1	2	2	9
f		2 N.D.	1	1	3	1	1	7*
	40	+.2 N.D.	2	3	2	3	3	13
		Normal	3	2	1	2	2	10
:		2 N.D.	1	1	3	1	1	7*
	20	+.2 N.D.	2	3	3	3	3	14
	20	Normal	1	1	1	1	2	6*
		2 N.D.	3	2	2	2	1	10
	33	+.2 N.D.	2	3	3	3	3	14
	აა	Norma!	3	2	2	2	2	11
		2 N.D.	1	1	1	1	1	5*
	40	+.2 N.D.	2	3	3	3	3	14
		Normal	3	2	2	2	1	10
		2 N.D.	1	1	1	1	2	6*
		 J						

- 17 -

# Ranking of Exposure (Continued)

	_	1		Ran	ık Obse	erver		
Target No.		Exposure	<u>1</u>	2	<u>3</u>	<u>4</u>	<u>5</u>	Total
Target IVO.		+.2 N.D.	3	3	3	3	3	15
			1	2	1	1	2	7*
20		Normal	2	1	2	2	1	8
		2 N.D.	-	•	_			
		+.2 N.D.	2	3	3	3	3	14
		Normal	1	2	1	1	2	7*
33		-,2 N.D.	3	1	2	2	1	9
		-,2 N.D.	•					
		+.2 N.D.	3	3	3	3	3	15
		Normal	2	2	2	1	2	9
40			1	1	1	2	1	6*
		2 N.D.	•					_
		+.2 N.D.	2	3	2	3	2	12
		Normal	2 3	2	3	2	3	13
20	90	-,2 N.D.	1	1	1	1	1	5*
		2 N.D.	•					
		+.2 N.D.	3	3	2	3	3	14
		Normal	, 2	2	3	2	2	11
33			1	1	1	1	1	5*
		2 N.D.	•	•	•			
		+,2 N.D.	3	3	2	3	3	14
			. 2	2	3	2	2	11
40		Normal	1	1	1	1	1	5*
		2 N.D.	•	•	•	•		

<sup>\*</sup>Select for Paired Comparison.

<sup>+</sup>Tie score was broken by two additional observers.

# APPENDIX D. RATIO TO Z SCORE--PAIRED COMPARISON TEST, TECHNICAL ANALYSIS

Ratio	Z Score	Z Transformed $[(Z \times 10) + 100]$
0/5	-2.33	76.7
1/5	-0.84	91.6
2/5	-0.25	97.5
3/5	+0.25	102.5
4/5	+0.84	108.4
5/5	+2.33	123,3

# APPENDIX E. PAIRED COMPARISON Z SCORE -- TECHNICAL ANALYSIS

Target			Observer				
Exposure	No.	Code	<u>1</u>	2	3	<u>4</u>	<u>5</u>
2 N.D.	20	11	102.5	102.5	91.6	97.5	102.5
2 N.D.	33	12	102.5	97.5	108.4	97.5	102.5
2 N.D.	40	13	102.5	102.5	102.5	97.5	102.5
2 N.D.	20	21	123.3	102.5	123.3	108.4	123.3
-,2 N.D.	33	22	123.3	102.5	123.3	123.3	123.3
2 N.D.	40	23	123.3	102.5	108.4	108.4	123.3
2 N.D.	20	31	108,4	123,3	108.4	108.4	108.4
2 N.D.	33	32	108.4	108.4	102.5	97.5	108.4
2 N.D.	40	33	108.4	108.4	123.3	123.3	108.4
Normal	20	41	97.5	102.5	76.7	97.5	91.4
2 N.D.	33	42	97.5	123.3	91.6	102.5	91.4
2 N.D.	40	43	97.5	102.5	91.6	91.6	91.4
-,2 N.D.	20	51	76.7	91.6	97.5	76.7	76.7
2 N.D.	33	52	76.7	91.6	76.7	76.7	76.7
2 N.D.	40	53	76.7	97.5	76.7	76.7	76.7
Normal	20	61	91.6	76.7	102.5	102.5	97.5
Normal	33	62	91.6	76.7	97.5	102.5	97.5
2 N.D.	40	63	91.6	76.7	97.5	102.5	97.5

# APPENDIX F. DIMENSIONAL STABILITY DATA-MENSURATION ANALYSIS

#### Mensuration Distance

-		ance 1 ss Track)			ance 2 g Track)	
	Exp.	Mean (µm)	Variance (µm²)	Exp.	Mean (μm)	Variance ( $\mu$ m <sup>2</sup> )
	,	13668.7	1.98	-	14270.8	5.18
	N	13666.4	3.03	+	14270.4	12.33
	N	13665.0	3.88	N ·	14269.2	2.33
	N	13665.0	0.64	N	14228.6	0.77
	+	13664.9	1.71	+	14227.8	2.37
	_	13664.4	2.57		14226.6	4.23
	N	13663.8	1.64	-	14225.4	4.59
	_	13663.4	4.03	-	14224.4	5.29
	-	13663.1	2.31	+	14224.2	3.32
	+	13662.1	5.48	N	14223.7	1.66
	+	13661.8	1.21	+	14220.5	3.74
	-	13661.0	0.76	N	14219.4	0.61
	+	13655.3	2.59	-	14218.5	5.55
	-	13623.9	3.25	N	14218.4	1.72
	N	13623.8	2.57	-	14216.4	3.29
	+	13607.5	4.65	+	14213.4	2.01
	-	13545.0	10.25	N	14210.1	2.60
	N	13542.9	6.90	+	14203.9	0.42
	+	13540.2	4.10	-	14193.6	1.15

25X1

<sup>+ = +.2</sup> Neutral Density N = Normal Neutral Density

<sup>- = -.2</sup> Neutral Density

# APPENDIX G. REPEATABILITY DATA AND RANKING-MENSURATION ANALYSIS

Exp.	Variance ( m <sup>2</sup> )
-	0.76
N	0.76
-	0.78
+	0.83
N	0.94
N .	0.95
-	1.02
+	1.18
N	1.24
-	1.25
-	1.26
-	1.34
+	1.58
, <b>+</b>	1.65
+	1.82
N	1.89
N ·	2.37
+	2.42

+ = +.2 Neutral Density
N = Normal Neutral Density

- = -.2 Neutral Density

# APPENDIX H. IMAGE QUALITY SCORES\*--MENSURATION ANALYSIS

Exp.	Score
N	71
N	67
N	67
-	66
+	62
-	61
-	55
+	55
N	55
+	53
-	50
-	48
N	46
-	46
N	45
+	. 42
+	40
+ .	38
L.	

<sup>\*</sup>The data used for comparing the films is the sum of the scores for each exposure per film type.

25X1